



Digiair

PRO T2



FEATURES

- Frequency range of 45-860MHz.
- The meter to use for easy Digital terrestrial installations.
- For measuring DVB-T and DVB-T2 signals.
- Very sensitive, easy to maximize weak and strong signals.
- Signal level reads out in dBu.
- Presents one channel readout with high resolution or six channels simultaneously or the complete spectrum.
- Built in beeper (pitch tone) and maxhold function.
- Aerial power output, 0, 5 and 12V.
- Built in, rechargeable battery.
- Power supply and car-charger enclosed.
- Carrying-case enclosed.
- Small and handy design.
- Made in Sweden.

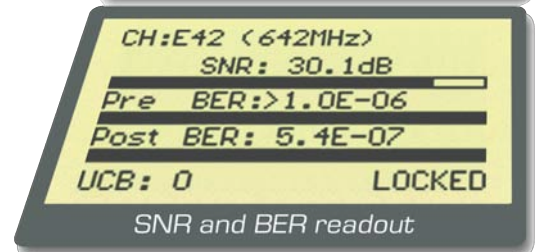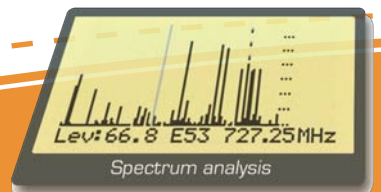

DigiAir

PRO T2

Emitor's DIGIAIR PRO T2 is developed in Sweden for exact alignment and adjustment of terrestrial antennas (DVB-T and DVB-T2).

Signals can be readout both analog (dBuV) and digital (BER, SNR, MER).

DIGIAIR Pro is microprocessor controlled, making it very reliable and accurate.

Signal strength is presented on the LCD-display. In analog mode it shows a single channel or six channels at the same time. You can also choose to view the signal in spectrum mode.

In digital mode it displays the BER (bit error rate) and SNR (signal/noise ratio). C/N and MER is also available.

Furthermore DIGIAIR Pro T2 present pitchtones (the higher tone the stronger signal) on a loudspeaker.

DIGIAIR Pro T2 is very sensitive and can detect even the weakest signals.

DIGIAIR Pro T2 can feed Voltage (5/12 Volt) to external active antennas this feature is short-circuit protected by an automatic fuse.

DIGIAIR Pro T2 is charged via an external DC power-source of 10 -18 volt.

The DIGIAIR Pro T2 operates with 8xAA rechargeable batteries. The unit will work for at least 2 hours with fully charged batteries.

Even though the DIGIAIR Pro T2 has a lot of functions it is still very easy to use and has a very compact design.



Emitor International AB
Ostmastargrand 12
SE-120 40 Stockholm, Sweden
Phone: + 46 (0)8 5333 40 70
Fax: + 46 (0)8 5333 40 71
www.emitor.se

Technical specification

Input frequency:	45-860 MHz.
Input level:	30-80 dBuV.
Input impedance:	75 Ohm, F-connector.
Short circuit protection:	Automatic fuse on antennainput.
Measuring method, Digital:	The meter can lock on DVB-T and DVB-T2 signals (MPEG2 and MPEG4). Two bars showing BER (bit error rate) and SNR (signal/noise ratio).
Analog:	One bar showing dBuV in high resolution or 6 bars showing strength of 6 channels. Spectrum display. Pitch tone indication from beeper.
Signal-level readout:	digital BER and SNR values. analog dBuV with maxhold-function.
Power out:	0V, 5V, 12V and 24V.
Power supply/charger:	10 -18V DC (Centerpin +).
Display:	White Back-lighted 128x64 Pixels LCD.
Power consumption:	600mA.
Battery:	8x AA rechargeable batteries of 1200mA each.
Weight:	0.3 kg.
Dimensions:	185 x 115 x 50 mm.
Accessories:	Powersupply 12V DC, 1A Rubber-case. Power supply. Car charger.